


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B42D 15/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 98/53999</b>
			(43) International Publication Date: 3 December 1998 (03.12.98)
(21) International Application Number: PCT/GB98/01537 (22) International Filing Date: 27 May 1998 (27.05.98) (30) Priority Data: 9710818.7        27 May 1997 (27.05.97)        GB (71) Applicant (for all designated States except US): FRYCO LIMITED [GB/GB]; 22 Sedling Road, Wear District 6, Washington, Tyne & Wear NE38 9BZ (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): SHEARER, James, Alexander [GB/GB]; Loaningside Farm, Allendale, Hexham, Northumberland NE47 9AN (GB). (74) Agent: GIBSON, Stewart, Harry; Urquhart-Dykes & Lord, Three Trinity Court, 21-27 Newport Road, Cardiff CF2 1AA (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report.	

(54) Title: OPTICALLY VARIABLE DEVICES

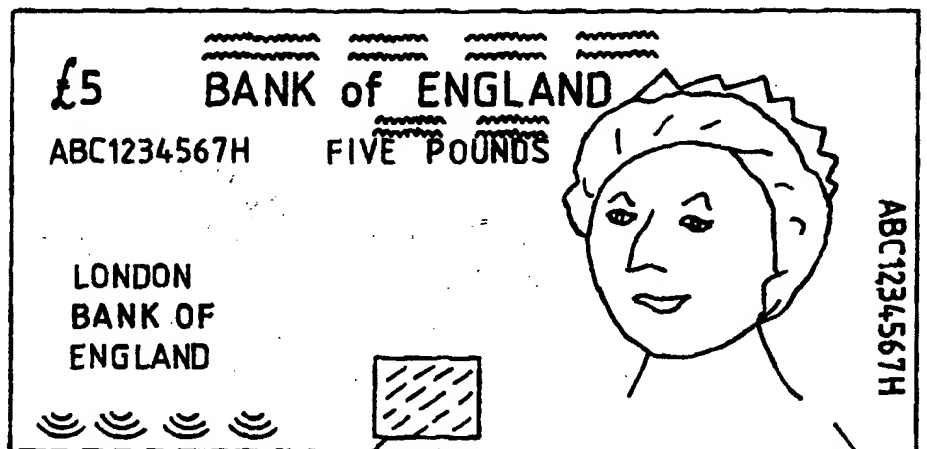

(57) Abstract

A substrate, such as a banknote (10) or other document of value, is provided with a security feature in the form of an optically variable device (12), by a process which comprises applying a coating of an ink to a discrete area of the substrate (10) by a printing process, then impressing the ink coating using an impression die, to form a pattern of reflective grooves in the surface of the inked area, these reflective grooves forming an optically variable image under incident light.

BEST AVAILABLE COPY

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Optically variable devices

The present invention relates to optically variable devices and more particularly to a method of forming optically variable devices on substrates, especially on documents of value (e.g. banknotes). The invention is moreover particularly  
5 concerned with optically variable devices (OVD's) which depend solely on light reflection, not light diffraction.

Diffraction OVD's, including holograms and electron beam diffractive structures such as Kinegrams and Exelgrams, comprise a micro-fringe diffractive structure which produces  
10 either two-dimensional or three-dimensional variable images by the diffraction of light. Typically, diffractive OVD's have a fringe spacing of 0.1 to 1.5 microns.

For diffractive OVD's to work efficiently, a reflective layer is applied over the micro-fringe structure. Typically  
15 the most effective reflective layer comprises vacuum deposited aluminium: for certain security applications, it is preferred to use a coating of high refractive index, comprising a rare earth oxide.

Diffractive OVD's are being used increasingly to combat  
20 the illicit replication or alteration of documents or other articles. Banknotes and other high security, printed documents are of particular concern. Traditionally such documents have used intaglio print, speciality rag papers (incorporating watermarks, embedded threads or window threads) or devices such  
25 as fluorescent threads, planchettes or latent images. However, with the advent of relatively inexpensive computers, laser scanners and colour copies etc., banknotes and other documents of value have become open to counterfeit abuse, not only by organised criminals but also by the casual counterfeiter simply  
30 replicating several banknotes or documents at his local colour copier shop.

As a consequence, banknote printers are being forced to consider new technologies to secure their products against modern replication technology. Diffractive OVD's represent  
35 effective technology and several countries have adopted them, in the form of an aluminium-coated, hot foil stamp, which is

applied to the surface of the banknote. Although the device is effective in preventing illicit replication, the additional cost of applying the device to a banknote or other document is high, and indeed prohibitive in the case of banknotes of relatively low denominations. Moreover, the OVD in the form of a hot stamp foil is not particularly robust and the normal lifetime of the banknote will usually be reduced.

It is an object of the present invention to provide a method of providing a substrate with an optically variable device in a simple and inexpensive manner, to provide an effective security feature.

In accordance with the present invention, there is provided a process for forming a substrate with an optically variable device, the process comprising applying a coating of a composition to an area of a surface of said substrate and then impressing said coating of composition to form a pattern of reflective grooves in the surface of the composition, so as to provide an optically variable image under incident light.

It will be appreciated that the optically variable device may be formed in a discrete area only of the substrate surface. In the case of a banknote or other document of value (e.g. ticket, receipt, certificate etc.), the remainder of the substrate surface remains available for printed or written information, design features etc.

The optically variable image (i.e. such that the image seen by the viewer varies with the angle of view) may be arranged to depend solely on light reflection, without light diffraction. International patent application WO98/08131 and International patent application WO98/20382 disclose optically variable devices of this nature, the groove or ridge spacings being in the range 2 to 100 microns, such that there is no light diffraction, only light reflection effects. In particular, in WO98/08131, an OVD is disclosed in which a substrate is formed with a plurality of stereo pairs of reflective elements (particularly grooves or ridges), each stereo pair of such elements providing an image of a point at a predetermined distance from the plane of the substrate: the plurality of these point-images form a three-dimensional optical image; the arrangement produces images in three

dimensions with true parallax. In WO98/20382, an OVD is disclosed in which a substrate is formed with a plurality of groups of elemental areas, the different groups forming respective image pixels: the different elemental areas of each group are formed with respective sets of reflective grooves or ridges, with the grooves or ridges of the different elemental areas being at different orientations. This arrangement produces a two-dimensional optical kinetic image.

In such arrangements, all of the image is seen as reflected light and consequently the image replays in the colour of the light with which its pattern of grooves or raised ridges (herein referred to as "fringes" for convenience) is illuminated. For example, if the device is viewed under blue light, the image will be blue, whilst if the device is viewed under white light, the image will be white.

In the method of the present invention, preferably a composition (e.g. an ink) is selected which, when dry, has a high gloss surface finish. This ink or other composition can be printed onto the substrate surface, and then impressed with a metal stamper to form a surface relief pattern in the ink. The gloss surface to the grooves thus formed provides for reflection of incident light and the pattern of grooves is such as to provide a variable optical image. Preferably the colour of the ink contrasts strongly with the colour of the light under which the image is intended to be viewed: if white light is used to replay the image, then a white image will be seen, so that a black ink would then give maximum contrast and greatly enhance viewability of the image.

Suitable compositions include gloss intaglio inks, acrylic inks and water-based black gravure inks (e.g. Sicpa KS 80007S). Preferably the impressing die is pre-heated. Preferably the fringe aspect ratio (ratio of pitch: depth of the grooves formed in the ink surface) is 1:1, although ratios as low as 20:1 may be used. The thickness of the ink required is dependent on the fringe aspect ratio, depth of the fringes and the surface texture of the paper or other substrate on which it is printed.

Preferably 3 to 8 gms per square metre of ink is applied to the paper or other substrate. Preferably the area

of the paper to which the security feature is to be applied is super-calendared prior to printing. Alternatively, an initial coating may be applied to remove any surface irregularities, before a top coating of ink is applied and subsequently  
5 impressed. The initial coating may comprise an ink of the contrast colour, or different areas of different contrast colours to provide a printed background design. The top coating of ink may be transparent but with a high gloss surface finish.

10 Banknotes or other documents can be printed with their usual features of information and design etc. by normal off-set and/or intaglio printing processes. The optically variable ink patch can be applied by a number of different processes, including silk screen printing. The sheets of banknotes or  
15 other documents thus printed can then be offered to a rotary or platen press fitted with an impression plate to impress the optically variable fringe pattern into the surface of the ink patch. This allows the printing machinery to run at maximum speeds, and the process is of relatively low cost.

20 In a modified process, a background patch, of contrasting colour or colours, can be printed e.g. by off-set or intaglio printing, and then a positive relief is printed on top of this using a clear or transparent, high gloss ink: the latter ink is thus applied as a pattern of raised ridges on the  
25 pre-printed base coat, these ridges being reflective to provide the optically variable image. In some circumstances, such a pattern of ridges can be applied directly to the surface of the substrate, using ink of a colour (e.g. black) to contrast with the light under which the image is to be viewed. Again, the  
30 fringe spacings are in the range of 2 to 100 microns, such that there is no light diffraction, only light reflection effects.

Embodiments of the present invention will now be described by way of examples only and with reference to the accompanying drawings, in which:

35 FIGURE 1 is a schematic plan view of a banknote provided with a security feature, in the form of an optically variable device, by a process in accordance with the present invention;

FIGURES 2 and 3 are schematic diagrams for use in

explaining the principles according to which one form of OVD may be provided in accordance with the present invention; and

FIGURE 4 is a schematic diagram for use in explaining the principles according to which a second form of OVD may be  
5 provided in accordance with the present invention.

Referring to Figure 1, there is shown a banknote 10 having an optically variable device (OVD) 12 formed over a discrete area of one surface of the banknote. The same surface of the banknote carries printed information and distinctive  
10 artwork in conventional manner.

The OVD 12 is formed, in the example shown, by applying an ink as a coating over that discrete area, by a printing process. This ink is one which exhibits a high gloss surface finish when dry. This patch of ink is then impressed with an  
15 impression die, to form a pattern of reflective grooves in the surface of the ink patch, to provide an optically variable image under incident light.

The pattern of reflective grooves is arranged to provide the optically variable image by light reflection,  
20 without light diffraction. In accordance with the teachings of WO98/08131, the pattern of reflective grooves may comprise a plurality of stereo pairs of grooves, each pair of grooves providing the image of a point at a predetermined distance from (i.e. in front of or behind) the plane of the substrate on  
25 which the grooves are carried. For example, Figure 2 shows a stereo pair of short, linear grooves 20,22 oriented to form, by reflection of the incident light beam B, a point image P at a distance behind the substrate in which the grooves are formed: Figure 3 shows a similar stereo pair of grooves 24,26  
30 oriented to form a point image P' at a distance in front of the substrate; in both cases, the distance of the point image (P or P') from the substrate is substantially equal to the distance r from each groove to the intersection of the lines normal to those grooves. The plurality of point images,  
35 provided by the plurality of stereo pairs of grooves, form a three-dimensional optical image, which varies according to the angle of view.

The pattern of reflective grooves may instead be arranged in accordance with the teachings of WO98/20382. In

this case, the security feature is made up of a plurality of groups of elemental areas, the different groups forming respective image pixels, with the different elemental areas of each group being formed with respective grooves or sets of grooves: the grooves of the different elemental areas of each group are at different orientations. Figure 4 shows one such group of elemental areas  $A_1$  to  $A_n$ , each formed with a set of parallel grooves  $32_1$  to  $32_n$ , but with the grooves of each such elemental area oriented at a different angle to the grooves of the preceding elemental area of the group. Thus, as the substrate, which carries these grooves, is turned through  $180^\circ$  in a counterclockwise direction, under incident light beam B, the successive elemental areas  $A_1$  to  $A_n$  become visible to the viewer in turn one-at-a-time. The group forms one pixel of an image: the OVD comprises a plurality of such groups, forming a corresponding plurality of pixels making up an image; rotation of the substrate accordingly produces, in effect, a dynamic movement of the image.

It will be appreciated that, in accordance with the invention, banknotes or other documents of value are provided with an optically variable image using apparatus and techniques which are basically conventional to the security printing industry. Even the impressing of the ink patch can be carried out using conventional equipment. The process provides a highly secure optically variable device, which cannot be replicated by the use of laser scanning, colour photocopying or other known techniques. Moreover, the process involves relatively low cost and can therefore be used on all banknotes, including those of low denomination.



Claims

- 1) A process for forming a substrate with an optically variable device, the process comprising applying a coating of a composition to an areas of a surface of said substrate and  
5 then impressing said coating of composition to form a pattern of reflective grooves in the surface of the composition, so as to provide an optically variable image under incident light.
- 2) A process as claimed in claim 1, in which said composition comprises a composition which has a high gloss  
10 surface finish, when dry.
- 3) A process as claimed in claim 2, in which said composition comprises a gloss intaglio ink.
- 4) A process as claimed in claim 2, in which said composition comprises an acrylic ink.
- 15 5) A process as claimed in claim 2, in which said composition comprises a water-based gravure ink.
- 6) A process as claimed in any one of claims 2 to 5, in which said composition is applied to said substrate by a printing process.
- 20 7) A process as claimed in any preceding claim, in which 3 to 8 grammes per square metre of said composition is applied to said substrate.
- 8) A process as claimed in any preceding claim, in which said step of impressing said coating of composition makes use  
25 of an impression die having a surface relief pattern complementary to the pattern of reflective grooves to be formed in the surface of said composition.
- 9) A process as claimed in claim 8, in which said impression dies is heated before application to said coating  
30 of composition on said substrate.

- 10) A process as claimed in any preceding claim, in which the aspect ratio of said grooves formed in said coating of opposition is between 1:1 and 20:1.
- 11) A process as claimed in any preceding claim, in which the spacing between adjacent said grooves is between 2 and 100 microns.
- 12) A process as claimed in any preceding claim, in which said substrate comprises paper and at least said area of the substrate is super-calendared prior to application of said composition.
- 13) A process as claimed in any one of claims 1 to 11, in which an initial coating is applied to said area of said substrate and then said composition is applied as a top coating over said initial coating.
- 14) A process for forming a substrate with an optically variable device, the process comprising applying a composition to said substrate in the form of a pattern of reflective ridges, so as to provide an optically variable image under incident light.
- 15) A process as claimed in claim 14, in which said composition is of a colour contrasting with the colour of said substrate.
- 16) A process as claimed in claim 14, in which a background patch is coated onto said substrate, said patch being of different colour or colours from the colour of said substrate, before said composition is applied over said patch in the form of said pattern of reflective ridges.
- 17) A process as claimed in claim 16, in which said composition is a transparent composition.

-1/2-

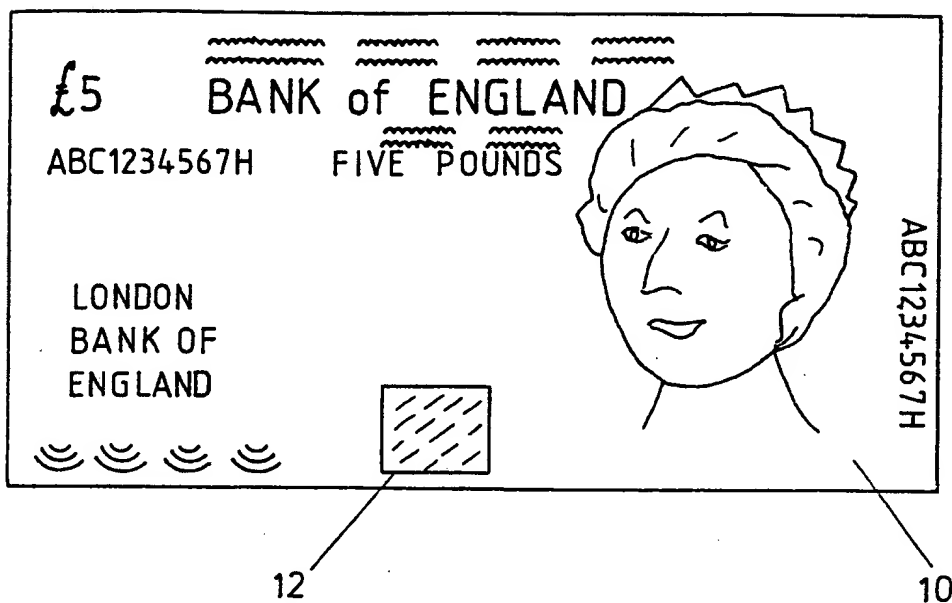


FIG. 1

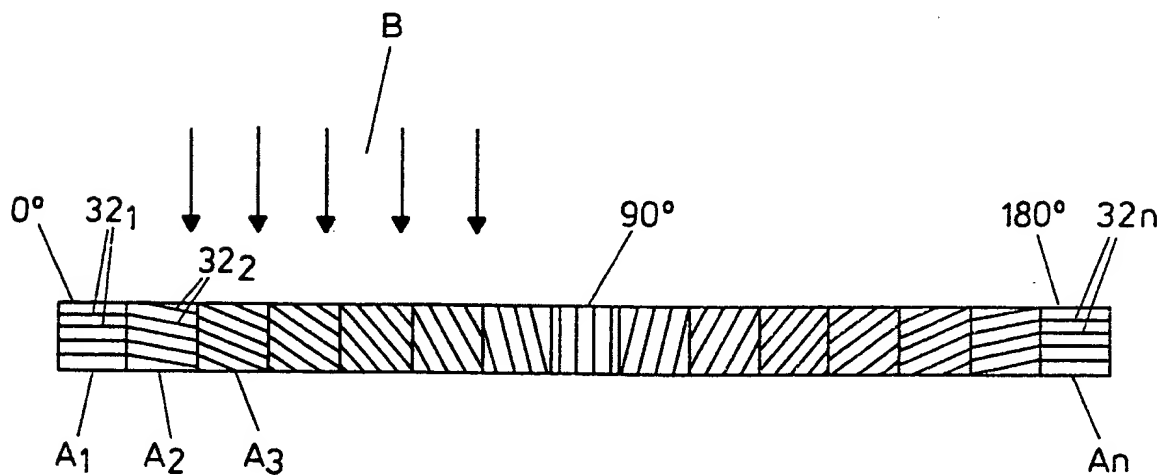
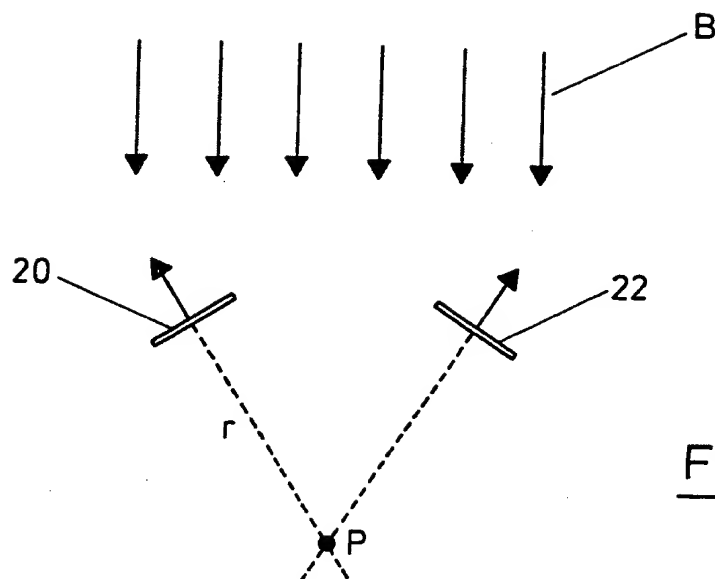
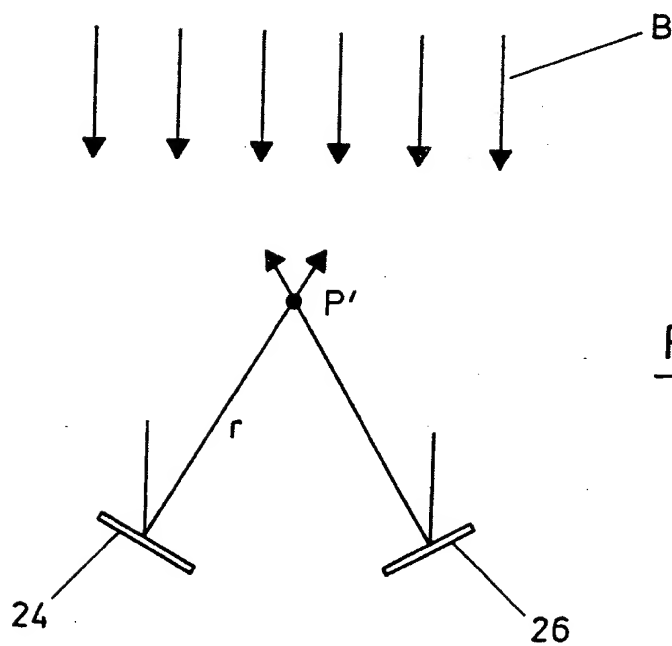


FIG. 4

BEST AVAILABLE COPY

-2/2-

FIG. 2FIG. 3

BEST AVAILABLE COPY

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/01537

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 6 B42D15/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 6 B42D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 195 41 064 A (GIESECKE & DEVRIENT) 7 May 1997 see column 2, line 48 - line 59; figures 2,4 ---	1,2,6
X,P	WO 97 34170 A (CHOCK) 18 September 1997 see claim 16 ---	1
X	EP 0 429 782 A (LANDIS & GYR) 5 June 1991 see the whole document ---	14
A	WO 94 29119 A (RESERVE BANK OF AUSTRALIA) 22 December 1994 see the whole document -----	1
<input type="checkbox"/> Further documents are listed in the continuation of box C. <span style="margin-left: 100px;"><input checked="" type="checkbox"/> Patent family members are listed in annex.</span>		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"S" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search  <div style="text-align: center; font-size: 1.2em;">3 September 1998</div>		Date of mailing of the international search report  <div style="text-align: center; font-size: 1.2em;">15/09/1998</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer  <div style="text-align: center; font-size: 1.2em;">Evans, A</div>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/01537

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19541064 A	07-05-1997	AU 7562096 A BG 101719 A CA 2209285 A WO 9717211 A EP 0801604 A PL 321140 A	29-05-1997 31-03-1998 15-05-1997 15-05-1997 22-10-1997 24-11-1997
WO 9734170 A	18-09-1997	AU 2174897 A	01-10-1997
EP 429782 A	05-06-1991	AT 105784 T DE 59005737 D FI 905917 A, B, JP 3182387 A NO 175930 B US 5106125 A	15-06-1994 23-06-1994 02-06-1991 08-08-1991 26-09-1994 21-04-1992
WO 9429119 A	22-12-1994	AU 680002 B AU 6920994 A CN 1124940 A EP 0710183 A FI 955882 A JP 8510967 T NO 954908 A NZ 267032 A SG 44393 A	17-07-1997 03-01-1995 19-06-1996 08-05-1996 07-12-1995 19-11-1996 04-12-1995 26-11-1996 19-12-1997